

FIG. 12B

PES

Error
Measure


BER

Displacement

de

dx

FIG. 13

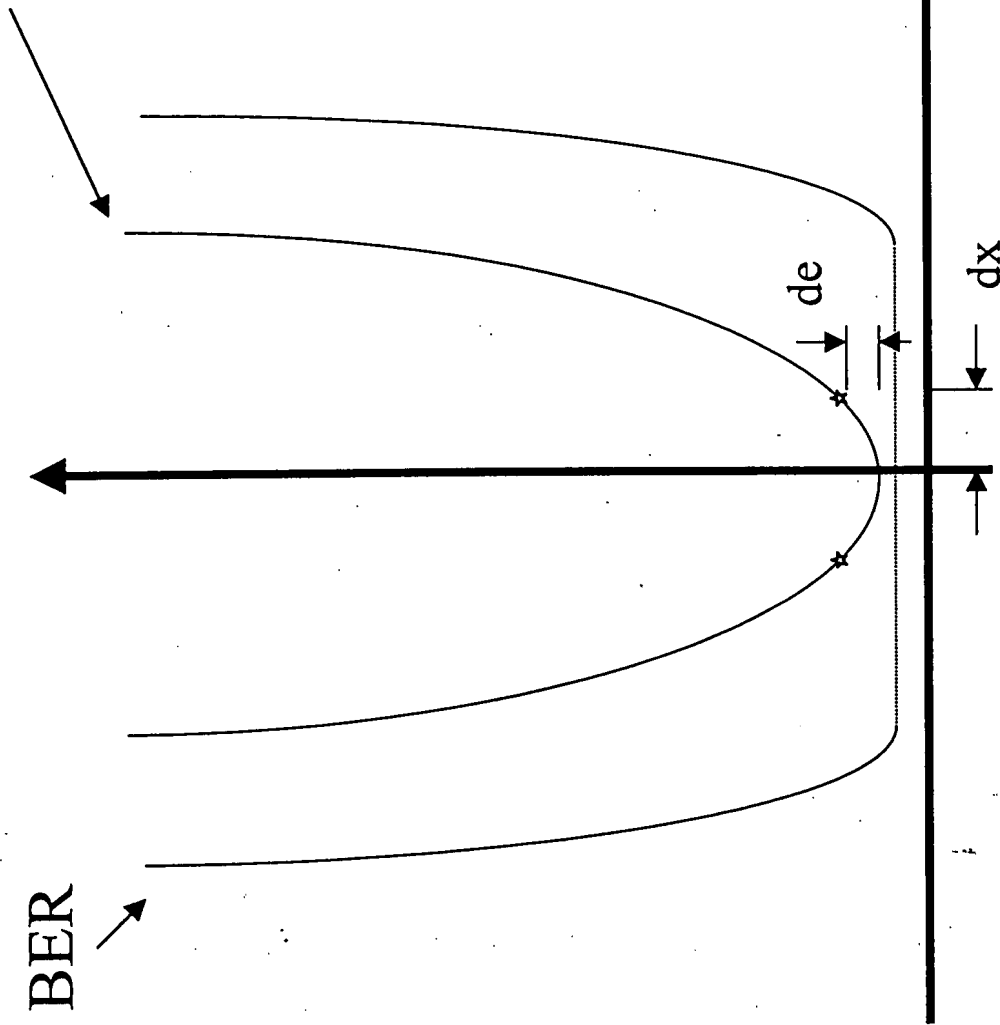

UNITED STATES GOVERNMENT
OFFICE OF THE SECRETARY OF DEFENSE
WASHINGTON, D. C. 20301-4000

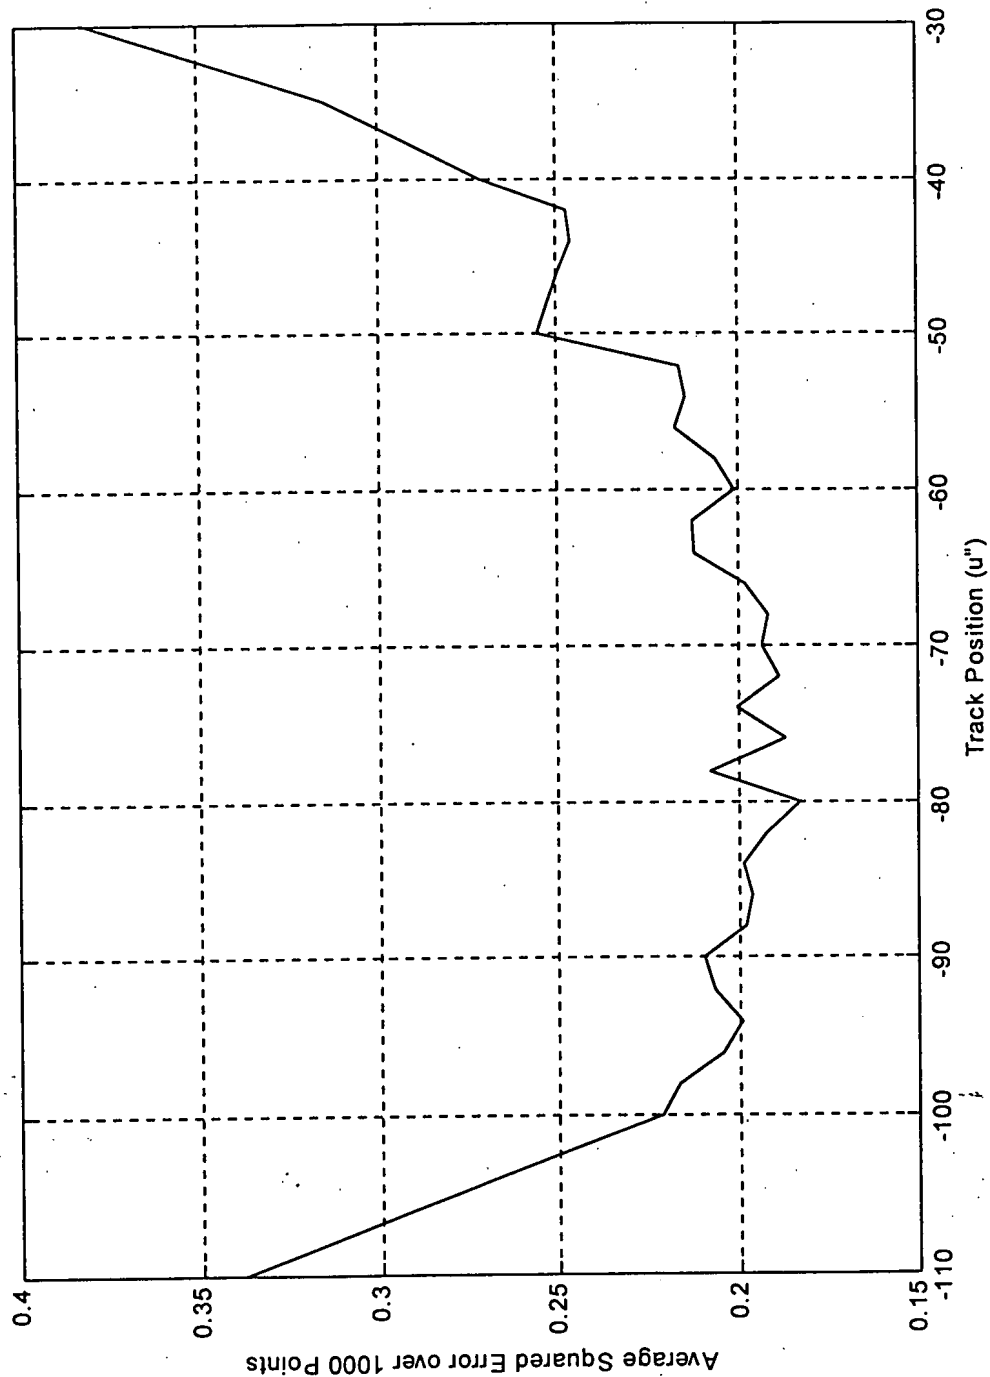


FIG. 14

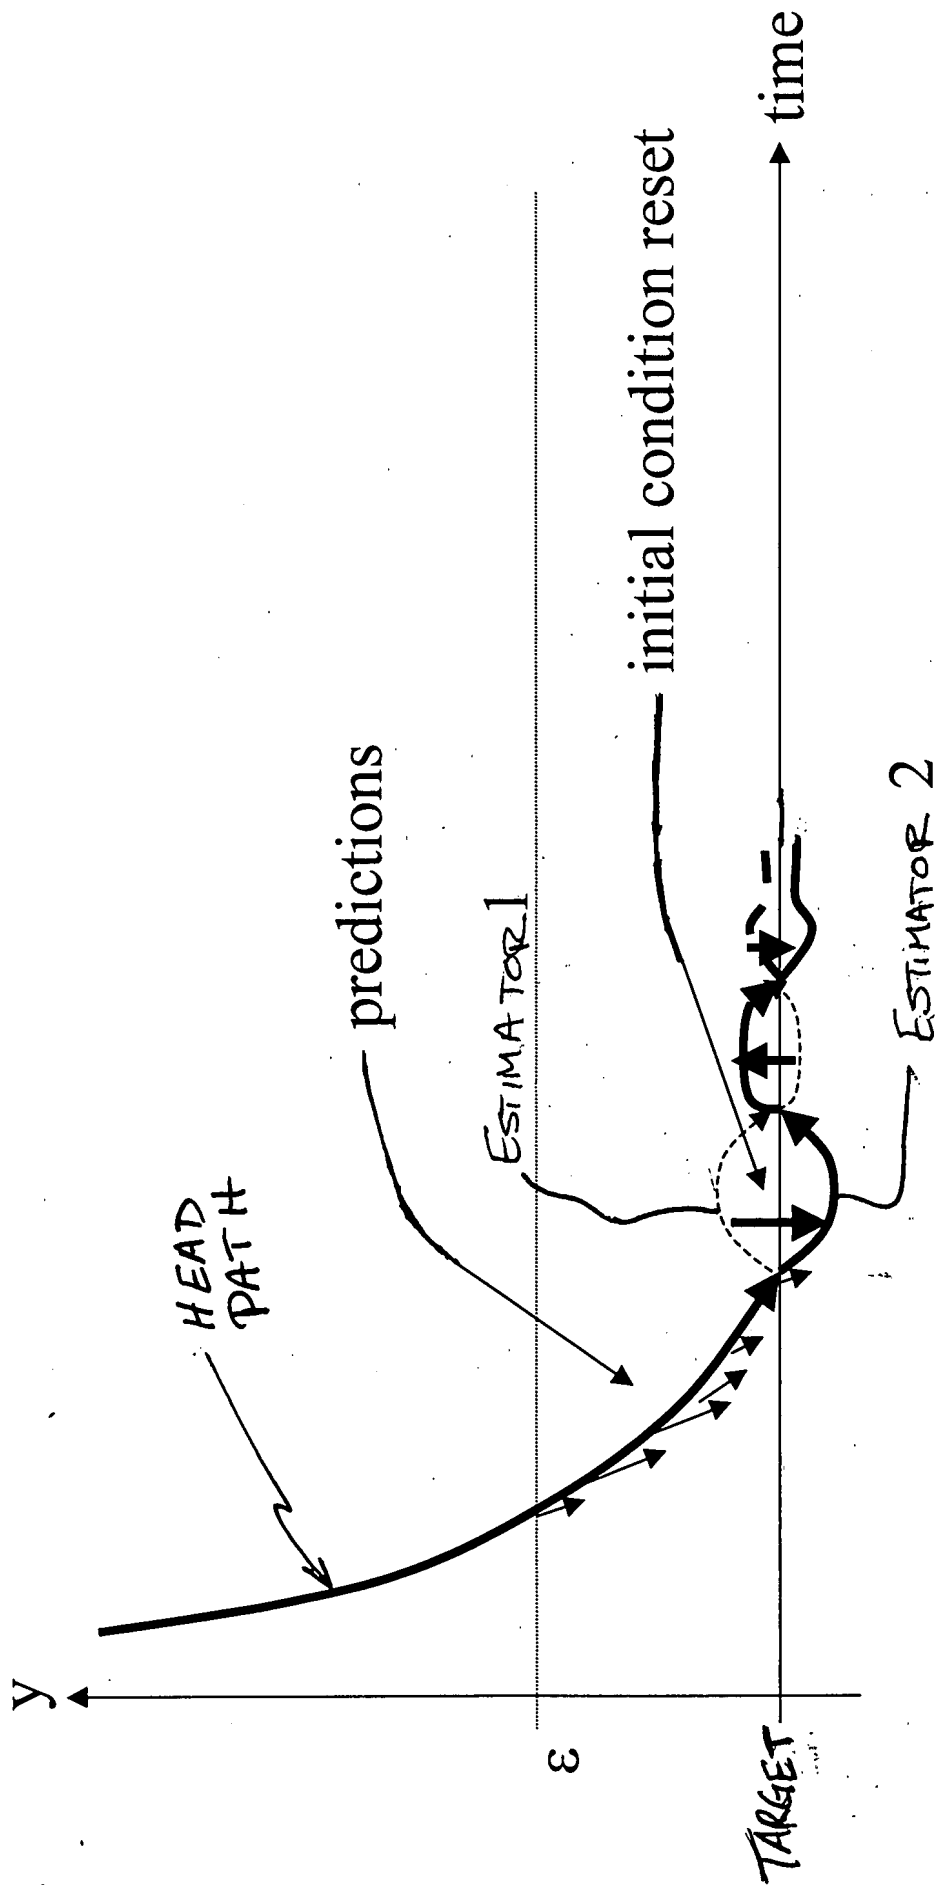


FIG. 15

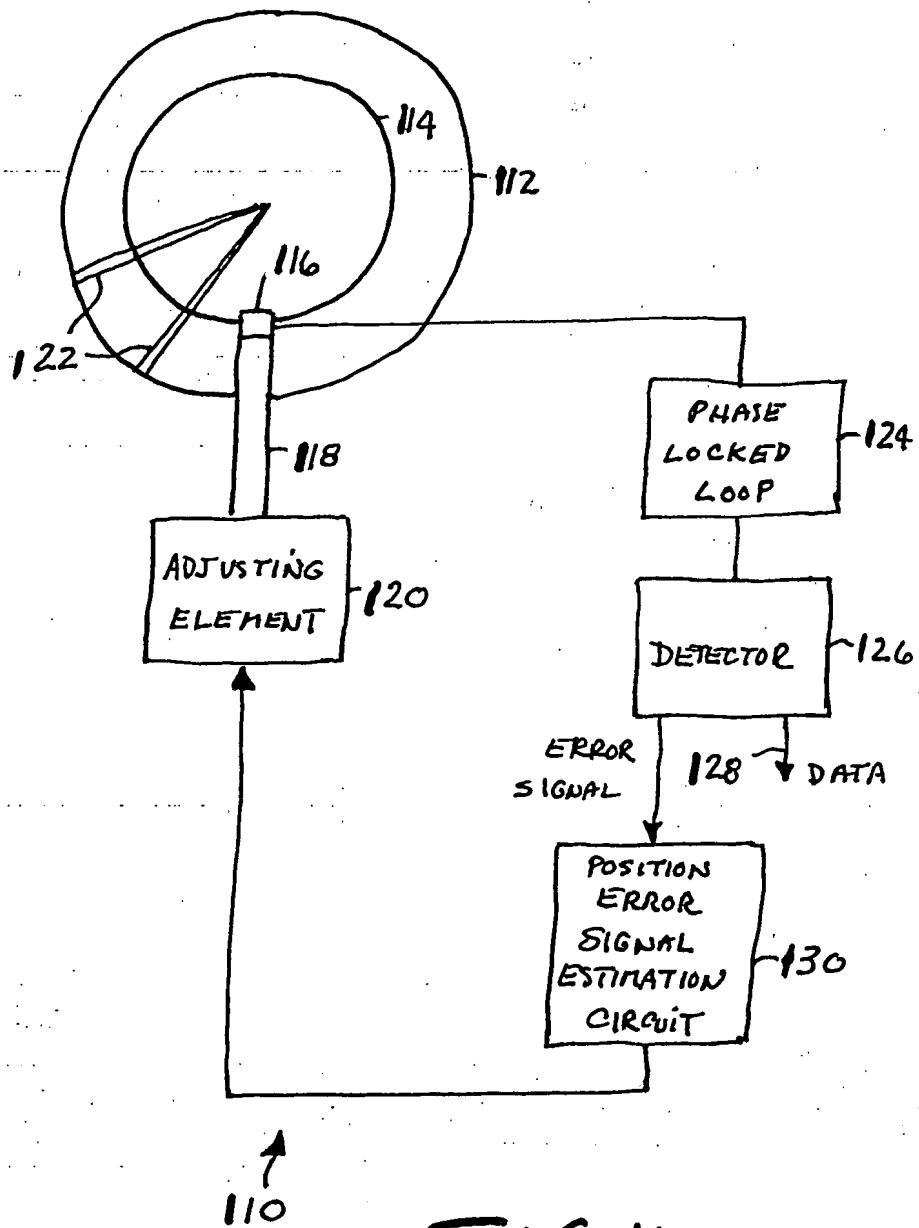


FIG. 14

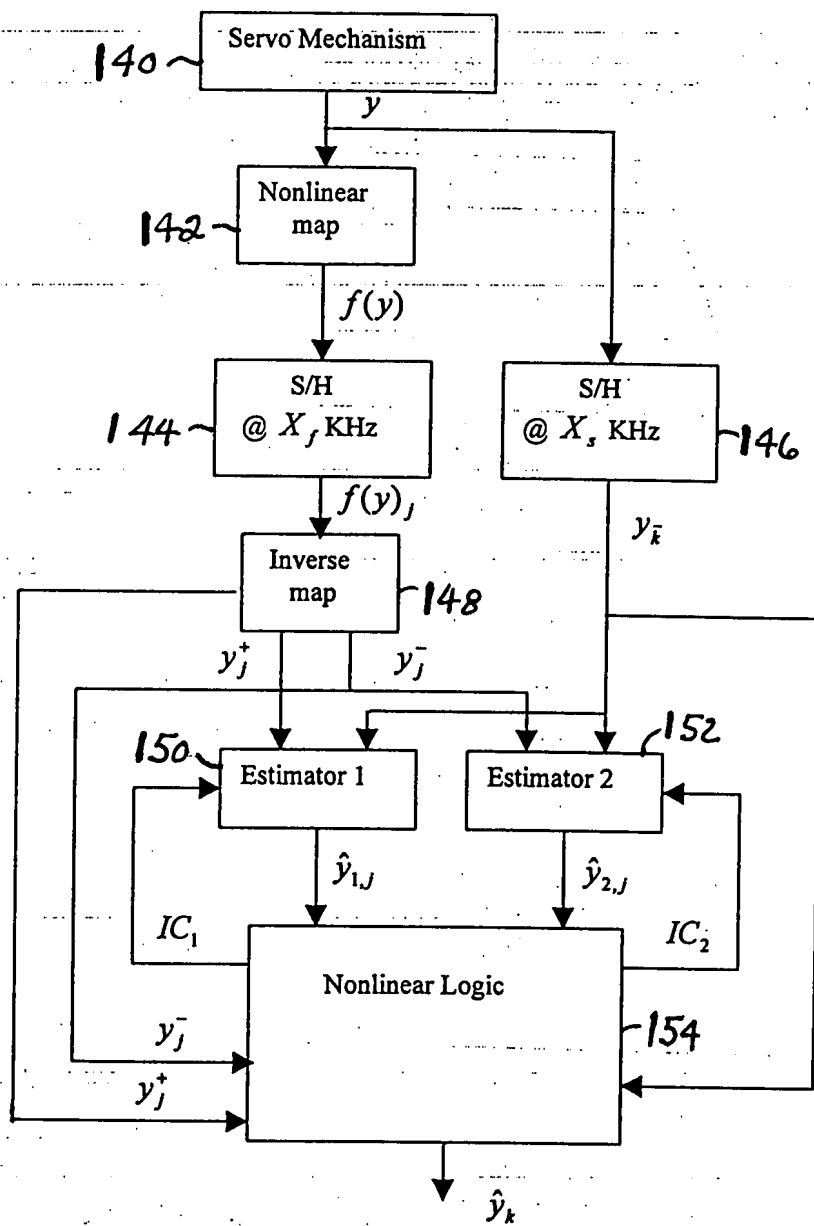


FIG. 17

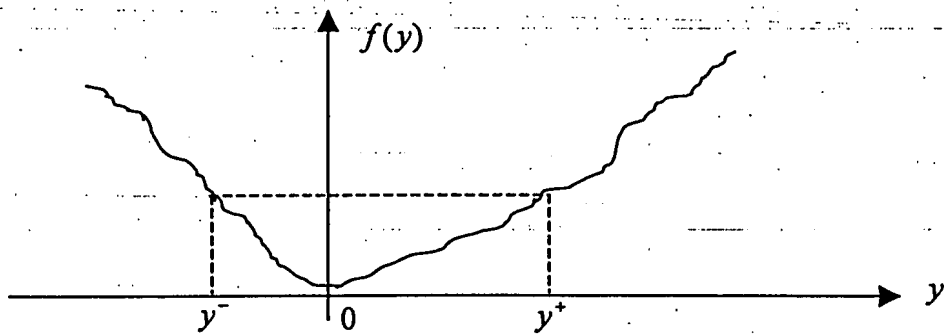


FIG. 18

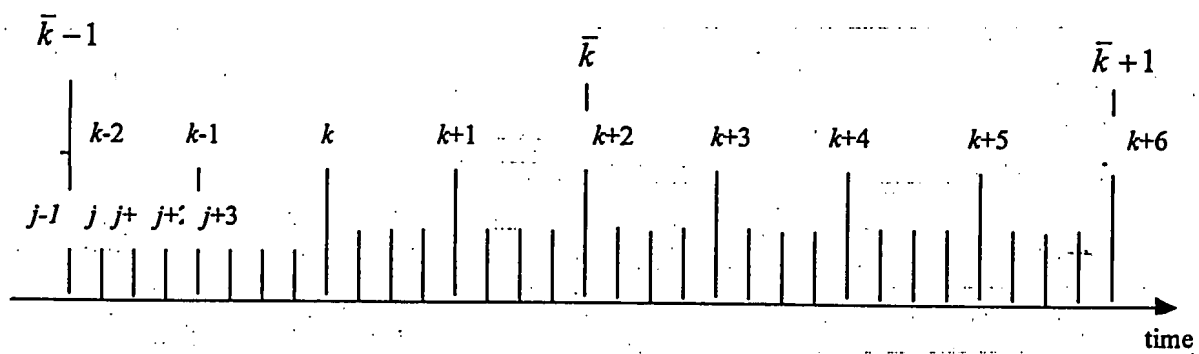


FIG. 19

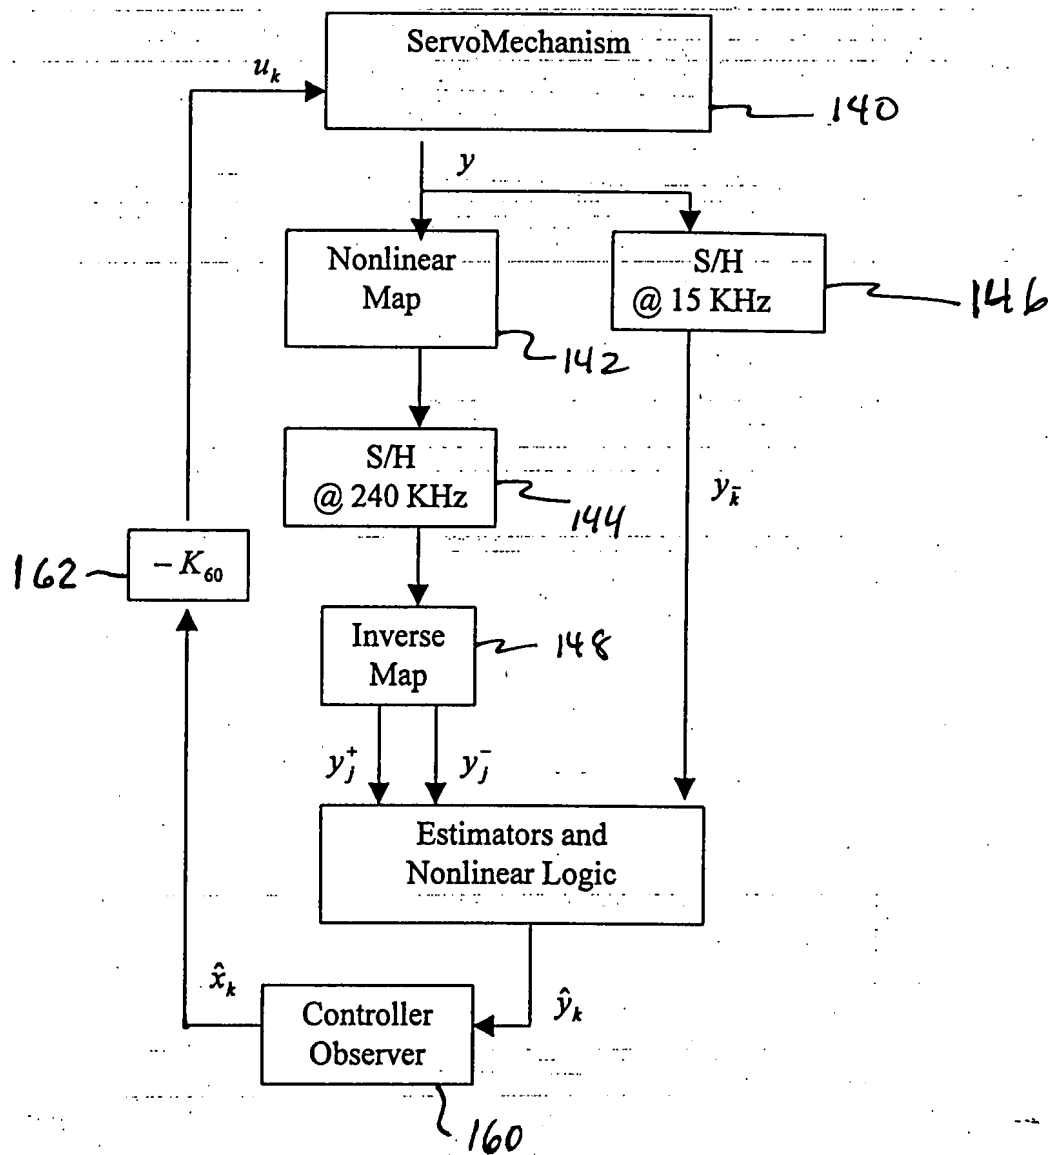


FIG. 20

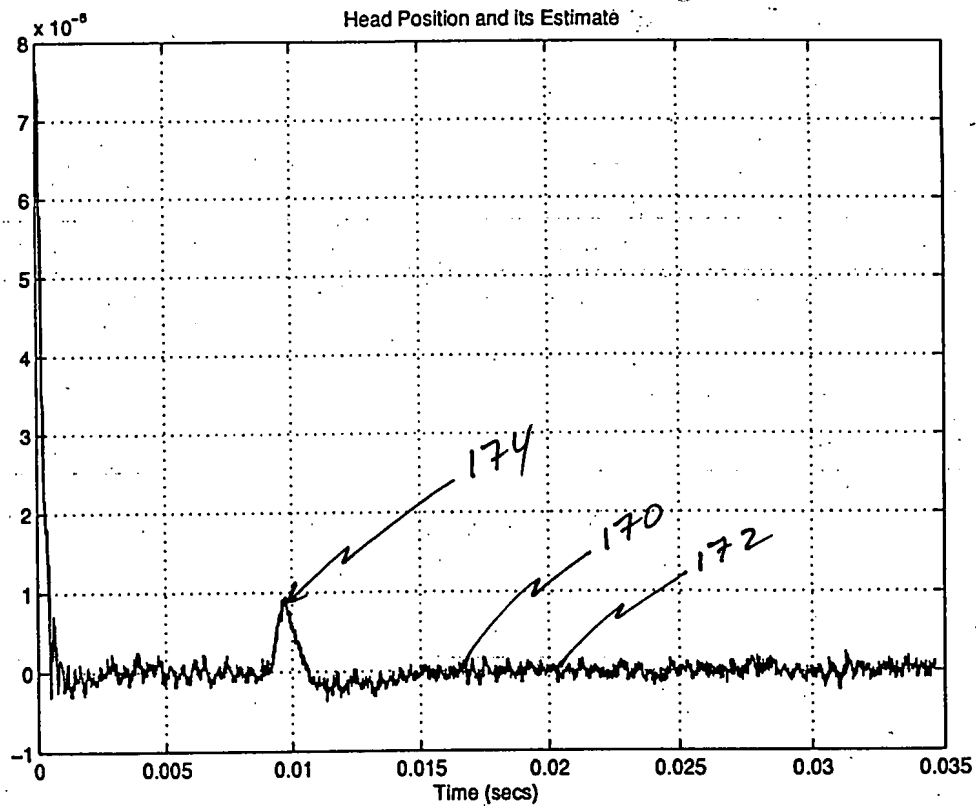


FIG. 21

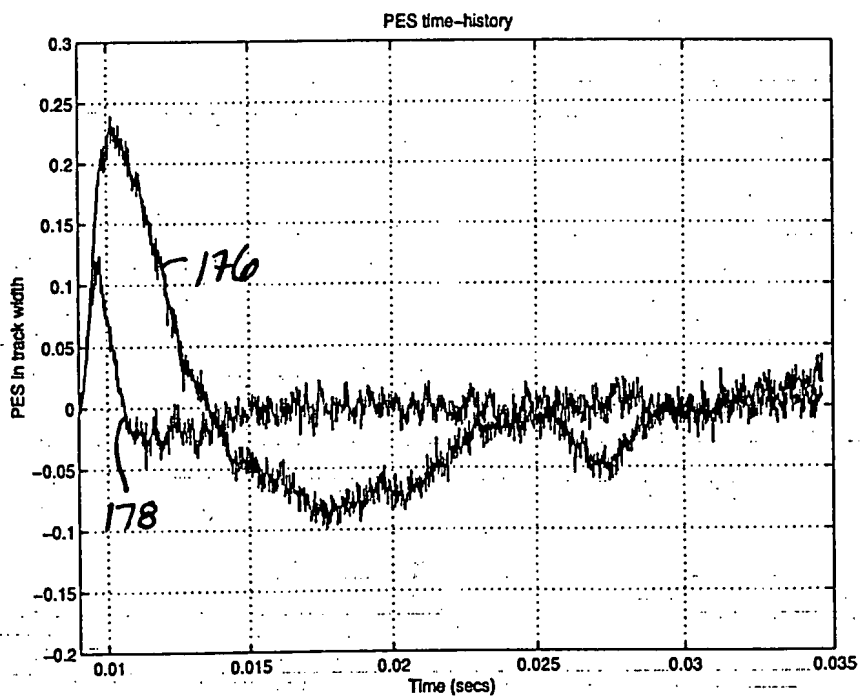
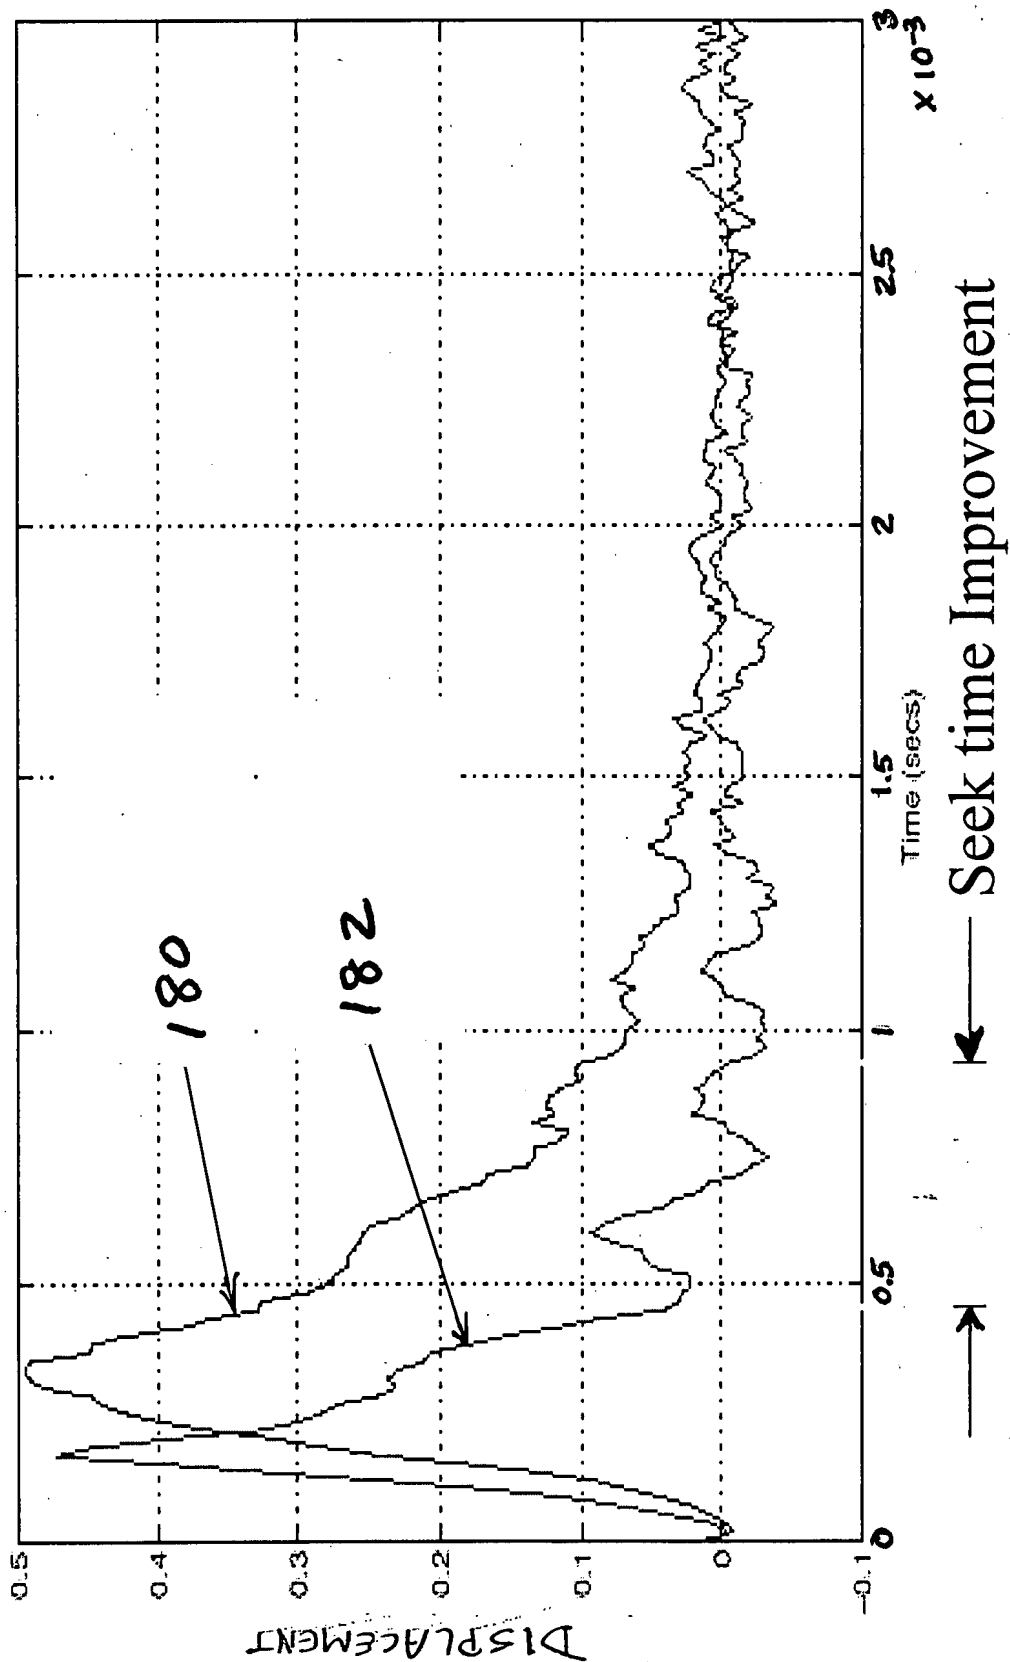


FIG. 22

FIG. 23



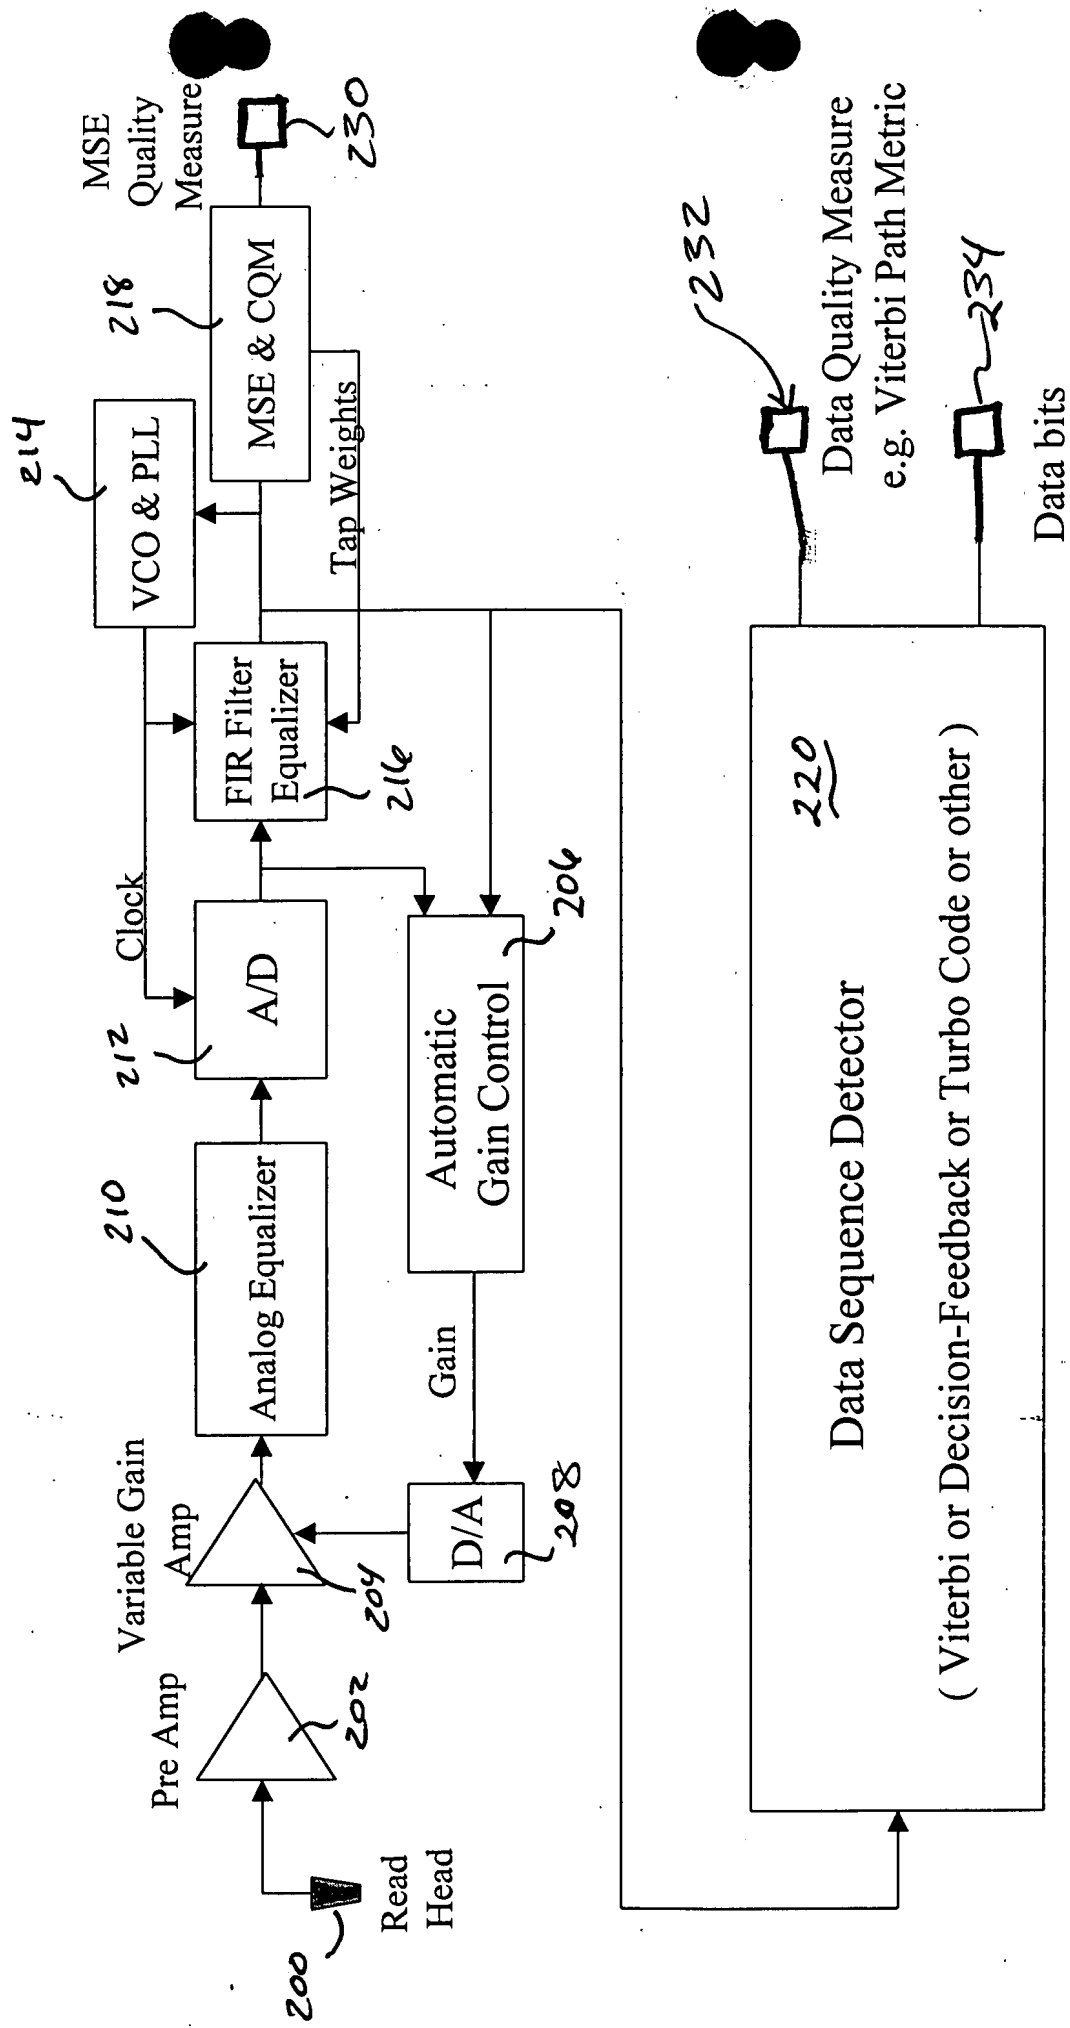
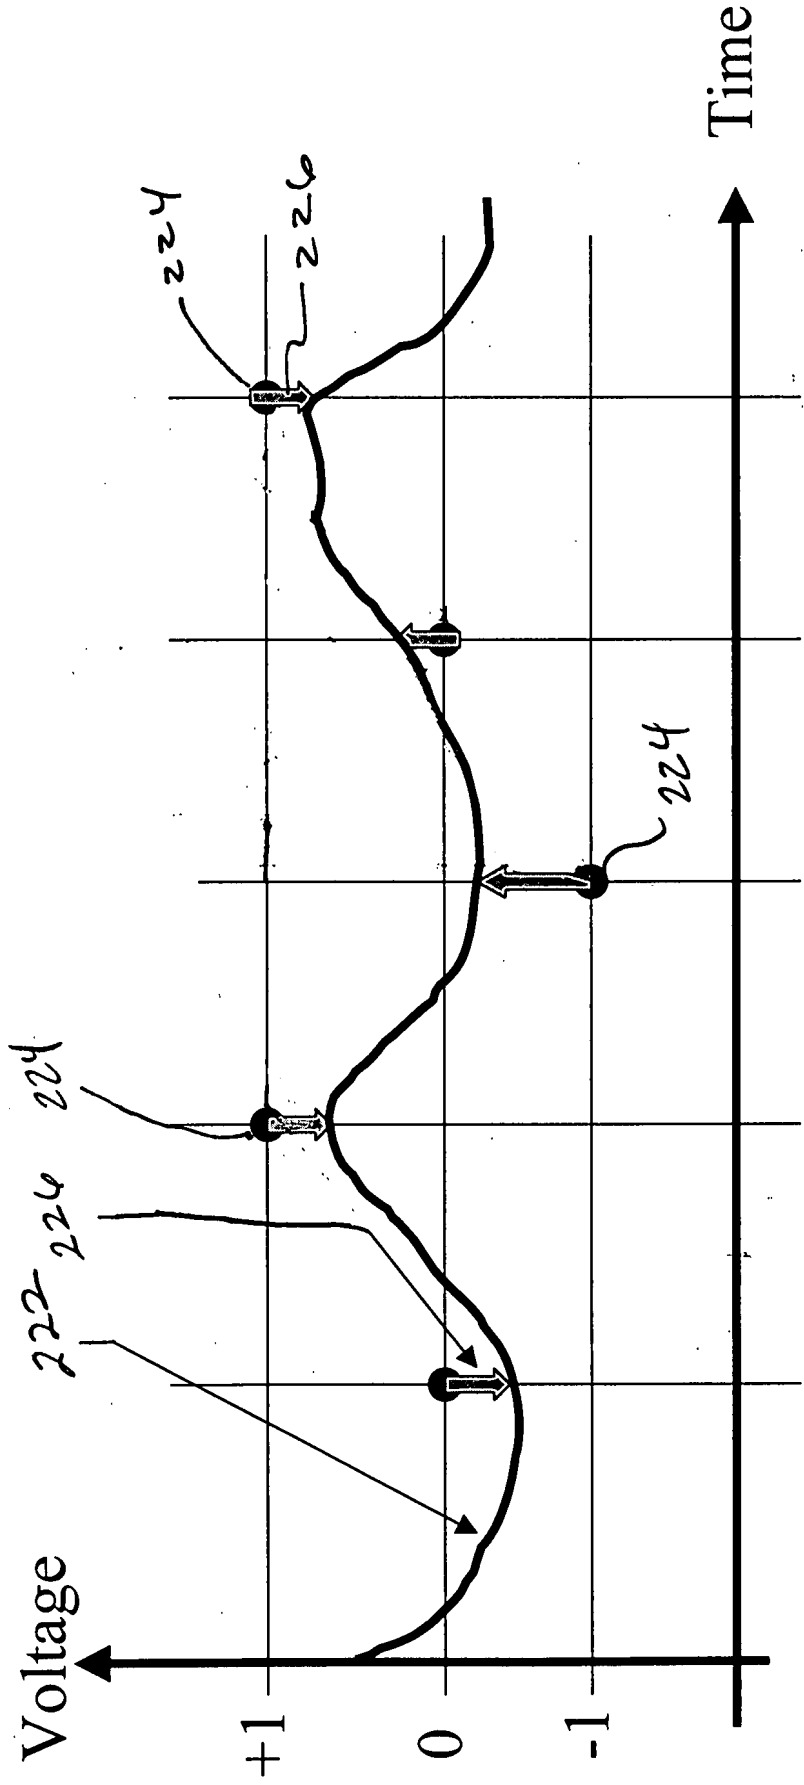


FIG. 24

FIG. 25



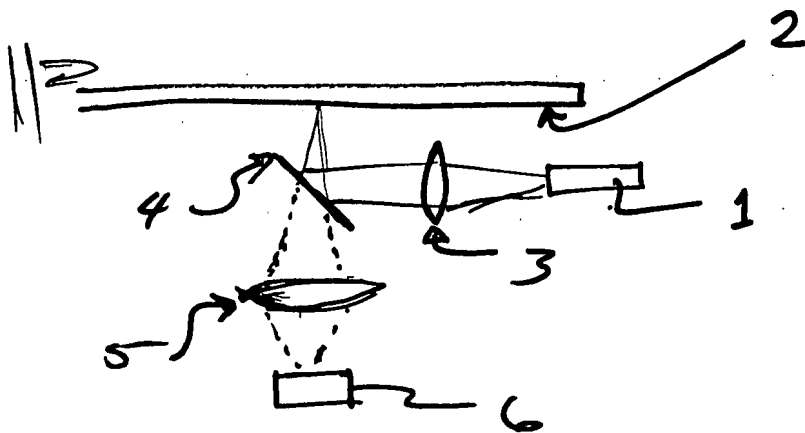


FIG. 1

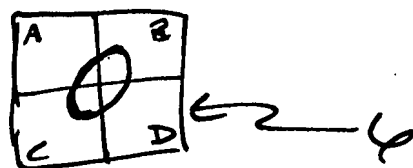


FIG. 2

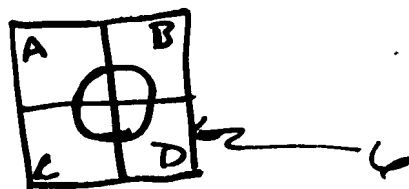


FIG. 3

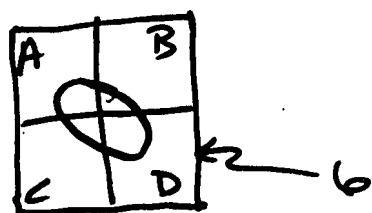


FIG. 4

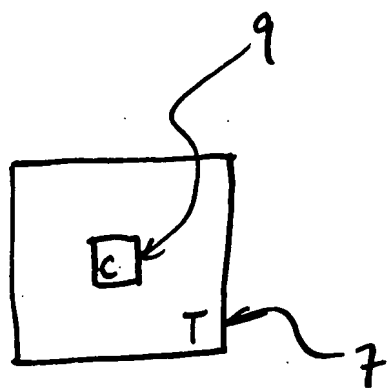


FIG. 5

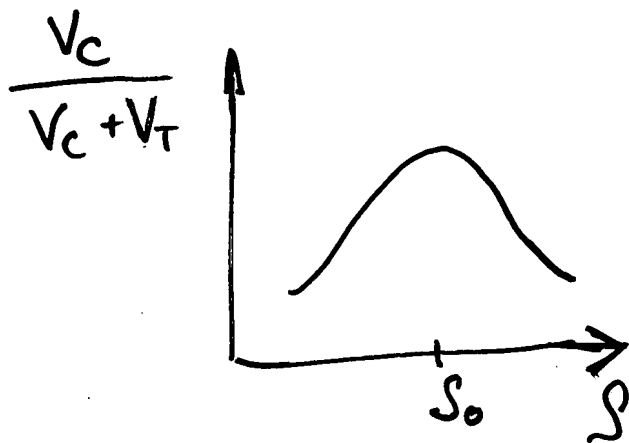


FIG. 6

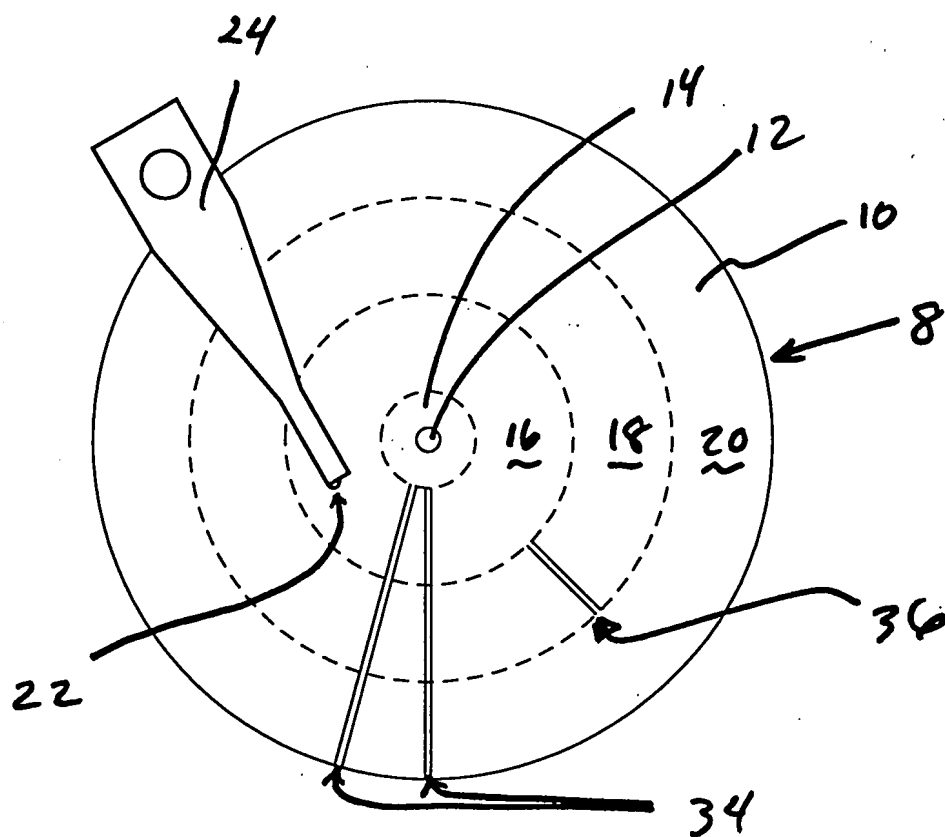


FIG. 7

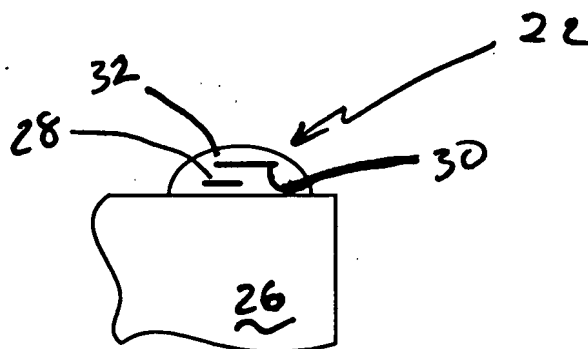
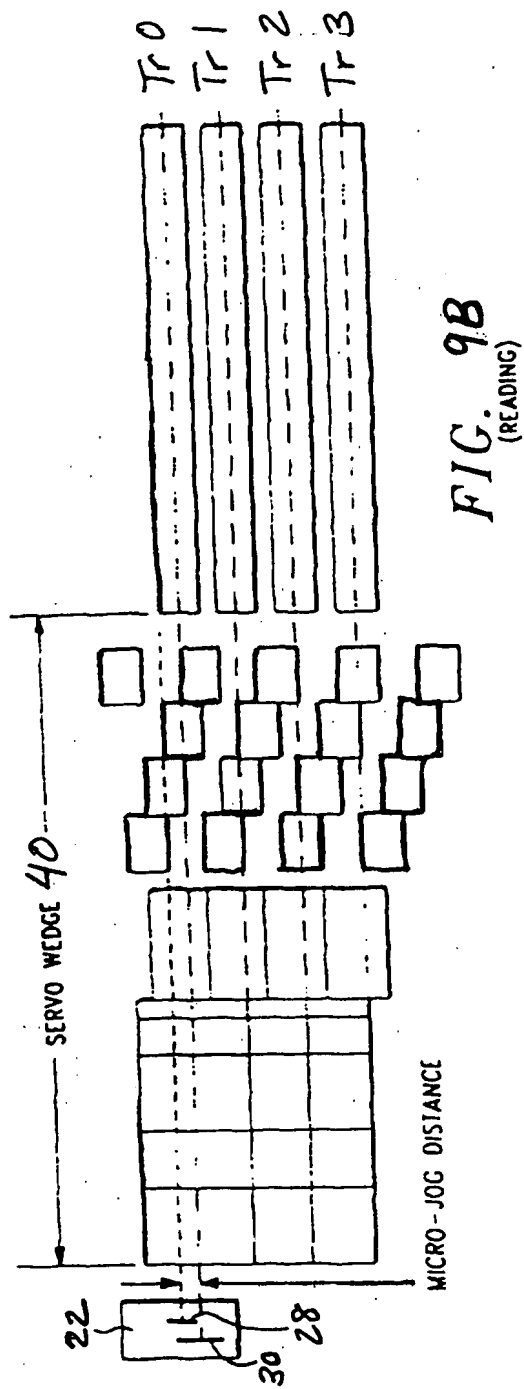
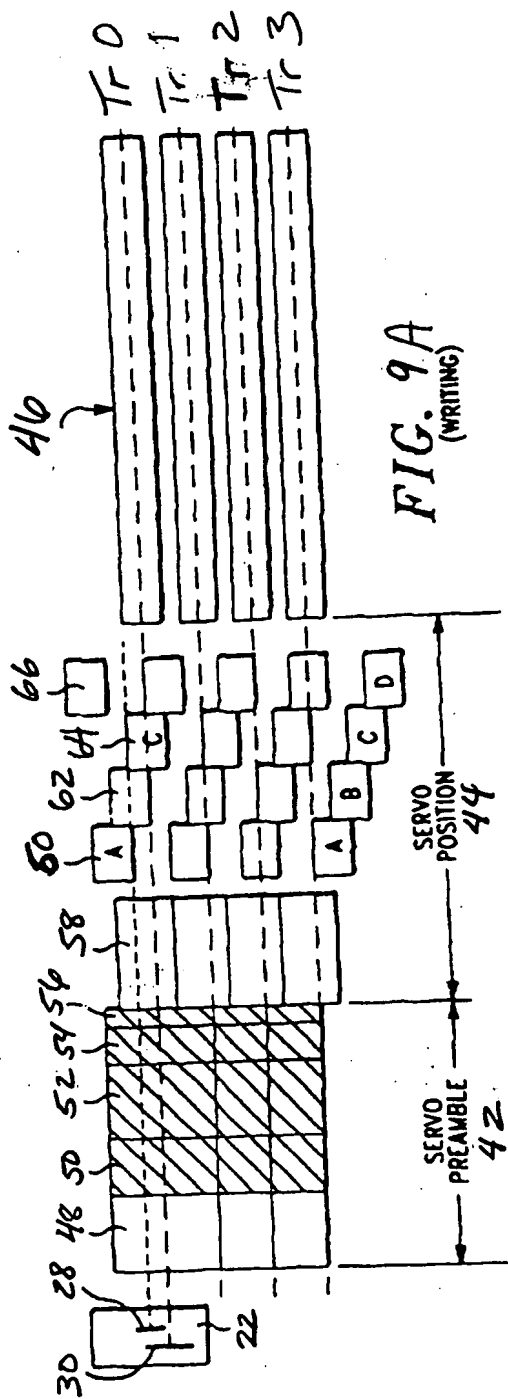


FIG. 8



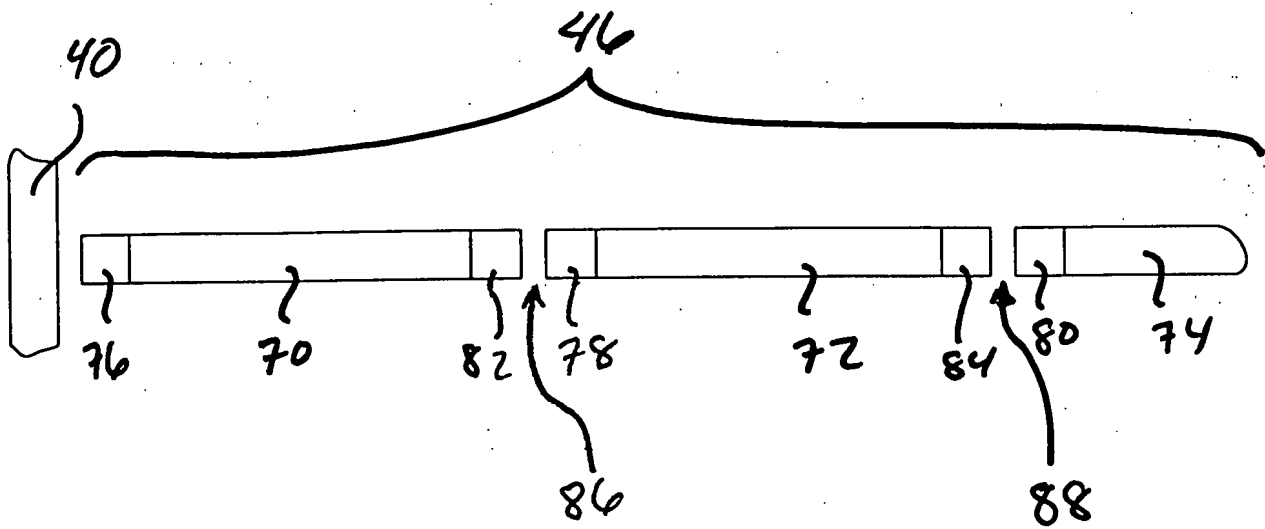


FIG. 10

FIG. 10 is a perspective view of the device of FIG. 1, showing the device in a folded position. The device is shown in a folded position, with the segments 76, 70, 82, 78, 72, 84, 80, and 74, and the brackets 40, 46, 86, and 88, as described above.